



DEVELOPMENT OF AN EARTHQUAKE EARLY WARNING SYSTEM BASED ON EARTHWORM. APPLICATION TO SW IBERIA

Núria ROMEU PETIT¹, Xavier GOULA SURINACH², José Antonio JARA SALVADOR³,
Yolanda COLOM PUYANÉ⁴ and Teresa SUSAGNA VIDAL⁵

ALERT-ES (*Sistema de Alerta Sísmica Temprana*) project is intended to study the feasibility of an Earthquake Early Warning System (EWS) for the potentially damaging earthquakes that occur in the zone San Vicente Cape-Gulf of Cadiz (southwest Iberia). An area characterized by the occurrence of large and damaging earthquakes, such as the 1755 Lisbon ($I_{max}=X$) or 1969 San Vicente Cape ($M_s=8.1$) events.

In this study we show the process to develop a prototype in Institut Cartogràfic i Geològic de Catalunya (ICGC) based on Earthworm USGS (2005) and the first results after a 6 month period working. The requirements that were taken into account were: an efficient reception of waveforms from seismic stations on the area of study; an optimization of the procedures of picking, event declaration and location to minimize the warning time for an acceptable location; and, finally, a quick computation of the proxies needed to estimate the magnitude.

The first step in the project was the choice of the structure of the modules of *Earthworm*, in this respect the processing modules were restricted to *pick_ew*, *binder_ew* and *eqproc*:

1. The main Earthworm module to automatically pick arrival times of the P waves, *pick_ew*, was modified in order to compute the P_d and τ_c parameters, for the estimation of the magnitude of an earthquake, in a window τ_0 whose length will depend on the epicentral distance of the channel being processed.

2. The module *binder_ew* originally has the purpose of automatically declaring events from the association of certain pickings of the P waves. It supplies a rough and quick hypocentral location of the event, which is updated for every new arrival-time received. However, this rough location was considered enough good to replace a proper locator in the ALERT-ES prototype.

3. Finally, the last processing module, *eqproc*, continuously gathers information from *pick_ew* and *binder_ew*, to assemble all parameters related to a new event and to publish the complete and updated location and magnitude. This module was deeply modified to estimate the event moment magnitude (M_w) from a weighted average of the magnitudes related to all P_d and τ_c stored parameters for each location received (Carranza et al, 2013).

The second step in the project has been fine-tuning the settings of the prototype to adapt its parameters to the area of study. The configuration of the automatic picking module, *pick_ew*, has been done for a total of 18 Broadband stations of three different networks: IM (Istituto de Meteorologia, Portugal), IGN (Instituto Geográfico Nacional, Spain) and WM (Real Observatorio de la Armada / Universidad Complutense de Madrid, Spain). The configuration of the event declaration and location was setup through 6 simulations of recent earthquakes. The results of the analysis proved that a 6-station configured system represented the best compromise between precision and elapsed time for the

¹ Engineer, Institut Cartogràfic i Geològic de Catalunya (ICGC), Barcelona, nuria.romeu@icgc.cat

² Head of Seismology, Institut Cartogràfic i Geològic de Catalunya (ICGC), Barcelona, xavier.goula@icgc.cat

³ Engineer, Institut Cartogràfic i Geològic de Catalunya (ICGC), Barcelona, joseantonio.jara@icgc.cat

⁴ Geologist, Institut Cartogràfic i Geològic de Catalunya (ICGC), Barcelona, yolandacolom@gmail.com

⁵ Seismologist, Institut Cartogràfic i Geològic de Catalunya (ICGC), Barcelona, teresa.susagna@icgc.cat

actual available stations deployed in the area (Dávila et al., 2014). Besides, the simulations of recent earthquakes made possible to check the quality of the hypocenter estimation referred to the Instituto Geográfico Nacional (IGN) catalogue: the average of the distance between those hypocenters was 47km for San Vicente Cape area and 22km for San Vicente Cape area; and origin time average error was 6.3s and -0.2s, respectively for each earthquake area.

The last step was to put the prototype to work for a stable period of 6 months in 23rd July 2013. A first successful result was that only regional events were detected, no noises, no teleseisms. A total of 44 regional earthquakes and in particular 9 from San Vicente Cape area and 17 from Gulf of Cadiz area were detected, as it can be seen in Figure 1. If we compare differences between actual hypocentral parameters determined by IGN and detected ones, the mean values are of the same order of those previously obtained in simulations (Dávila et al., 2014). Same coherent results are also obtained for average warning times for San Vicente Cape area (54s) and Gulf of Cadiz area (44s) and Lead Times at some towns as, Cadiz (50s and 0s respectively for each earthquake area), Seville (60s and 15s) or Lisbon (25s and 40s). Concerning estimations of the magnitude of the earthquakes, only 1 earthquake, from the 26 detected in the area of study, gave a likelihood M_w value. This particular event was the one with largest magnitude, $M_w=4.4$. After an analysis of the displacement records of all those events, only that event has a signal/noise ratio (SNR) high enough to estimate the M_w .

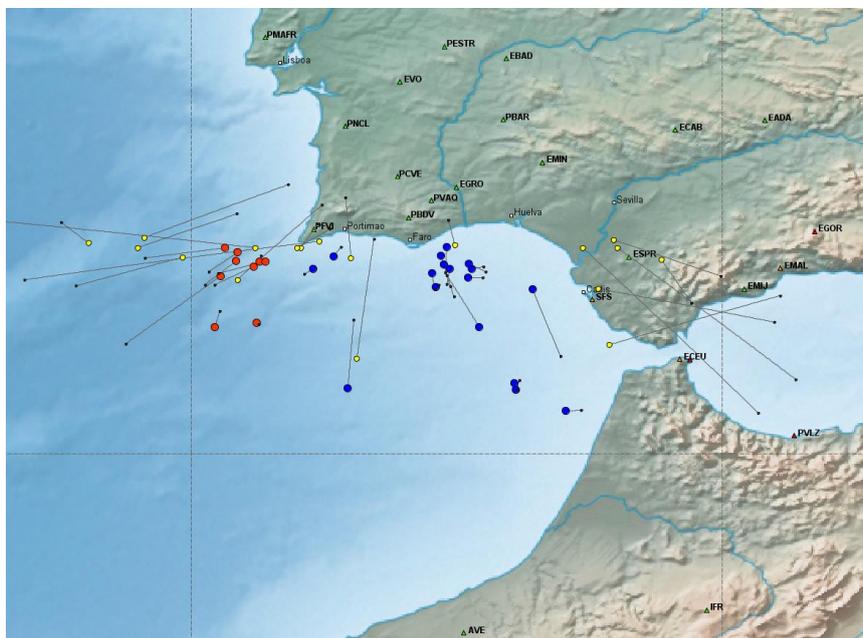


Figure 1. Results for a 6 months period analysed: reference epicentres are represented in small grey dots. They are joined to their corresponding automatic epicentre in dots of different colours depending on its area of origin (blue for Gulf of Cadiz, orange for San Vicente Cape and yellow for other regionals). Stations of the seismic network are depicted as triangles. Most populated cities are also shown.

Summarizing, an EEWS Earthworm based prototype has been developed, installed and under test during a 6 month period. The main conclusions are the following:

- i) detections are reliable, because no false events have been detected,
- ii) hypocenter location, warning times and lead times observed on some towns are useful and coherent with estimations previously done with simulations.
- iii) a longer test period with a SNR threshold over displacement signal will improve the confidence in magnitude estimations in desired earthquakes.

In consequence, an Earthquake Early Warning System based on Earthworm is feasible for southwest Iberia.

REFERENCES

- Carranza M, Buforn E, Colombelli S, Zollo A (2013) "Earthquake early warning for southern Iberia: A P wave threshold-based approach" *Geophys. Res. Lett.* 40, 4588-4593, doi: 10.1002/grl.50903.

Dávila JM, Goula X; Pazos A, Romeu N, Lozano N, Colom Y, Jara JA, Cantavella JV, Zollo A, Buforn E, Carrilho F (2014) “Seismic early warning system ALERT_ES: a simulation case study for southwest Iberia using different software packages” *Workshop Earthquake Early Warning System. Applications to the Ibero-Maghrebian Region*, Madrid, 4-5 February, 2014

USGS (2005) *Earthworm* <http://folkworm.ceri.memphis.edu/ew-doc/>